# FFH Series Cartridge M48\*1.5

#### Introduction

The FFH (M48\*1.5) Series is a replacement flat face cartridge coupler to suit the Faster 4BD4FH housings. Designed for quick attachment change over for skid steer loaders, compact loaders, track loaders.

## Construction

- Carbon steel with trivalent plating
- Seals Nitril Buna-N
- Back up Teflon
- Internal Springs 302 Stainless Steel
- Series Interchange ISO 16028


# Hydrauli

#### Specification

 Operating temperature with standard NBR seals –20°C (-20°F) to 120°C (248°F)

Size	MWP PSI	Flow Rate	Force to Connect N
1/2	5000	110	213
3/4	5000	160	215

Body Size	Thread	Female	Male	D	d	Hight
1/2	M48*1.5	FFHF-08M48	FFHM-08M48	38mm	24.5 mm	108 mm
3/4	M48*1.5	FFHF-12M48	FFHM-12M48	48 mm	30 mm	108 mm

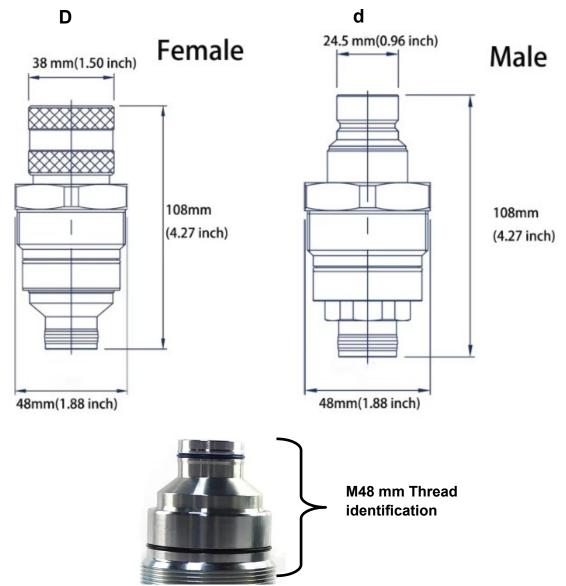

# FFH Series Cartridge M46\*1.5

## Introduction

The FFH (M46\*1.5) Series is a replacement flat face cartridge coupler to suit the Faster 4BD4FI housings. Designed for quick attachment change over for skid steer loaders, compact loaders, track loaders.

## Construction

- Carbon steel with trivalent plating
- Seals Nitril Buna-N
- Back up Teflon
- Internal Springs 302 Stainless Steel
- Series Interchange ISO 16028



### Specification

 Operating temperature with standard NBR seals –20°C (-20°F) to 120°C (248°F)

Size	MWP PSI	Flow Rate	Force to Connect N
1/2	5000	110	213

Body Size	Thread	Female	Male	D	d	Hight
1/2	M46*1.5	FFHF-08M46	FFHM-08M46	38mm	24.5 mm	102 mm



## D



